


# touchfoil™ driver configuration

## Language Selection

---


Drop down to select language (customisable in excel spreadsheet)

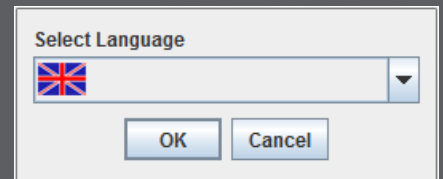

## Driver Selection

---


Drop down to select driver based on information in delivery documentation

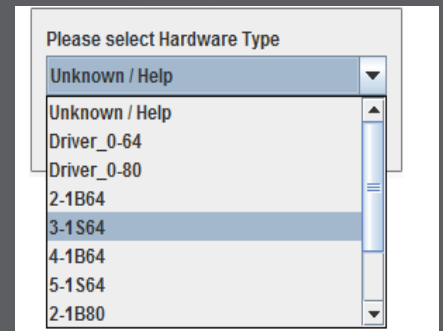

## Sense/Graph Tab

---


Set up touch sensitivity and monitor wire indicator movement

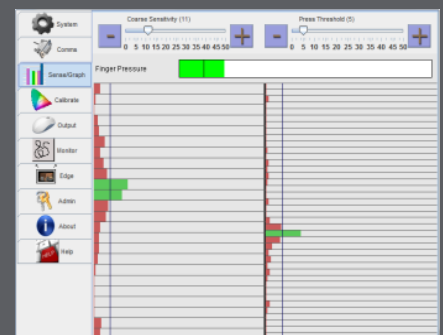

## Calibrate Tab

---

Select 'Calibrate' to begin calibration process

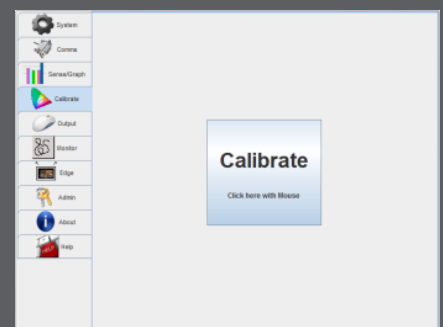

## CalibrationTouch Targets


---

Touch and hold each target to calibrate the visualplanet touchfoil™ with the display




## Comms Tab

Allows selection of sample time and viewing of status boxes

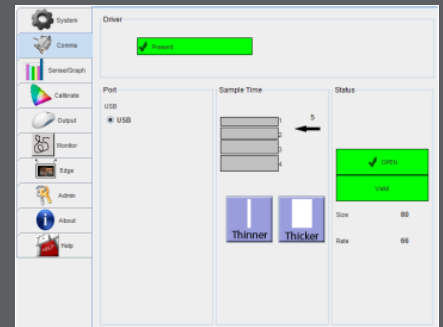

## Output

Configure the mouse control then select 'Enable selected control' to enable touch function

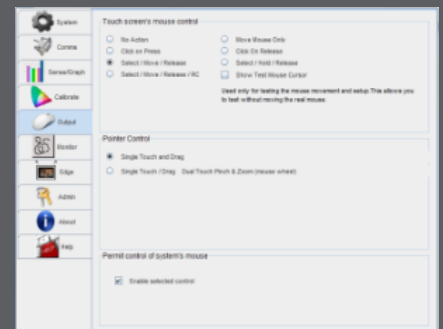

## System Tab/Save Configuration

Select 'Save Driver Configuration' to save the current settings

